

Smart Labels - V10 - D735

Smart Labels is a new and intelligent way to label function keys. Currently, Smart Labels are available for D735 and D765 from firmware version 10.1.27.0 onwards.

They ensure perfect readability of function key labels, even on phones with smaller display sizes.

There are two different modes of displaying Smart Labels:

- **Short** and
- **Full**.

And of course you can set it Off.

1) Short Mode

The “**Short Mode**” is the default mode, in which the labels are kept short, and the view of the main screen is left free.



2) Full Mode


The “**Full Mode**” expands the labels to full width.



Smart Labels - V10 - D735

3) Off Mode

If Smart Labels mode is set to Off, the full screen is visible, and labels are only shown when triggered by an action.

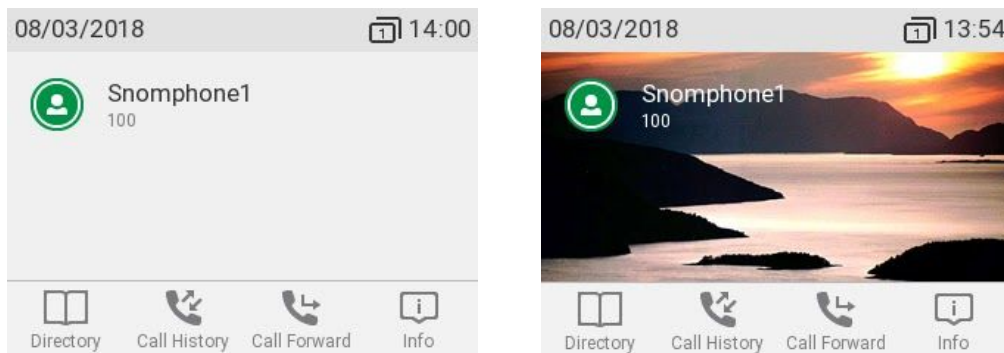

The switch between one state and another can be triggered by the built-in proximity sensor (D735) and/or the page key.

Trigger

There are several triggers for changing the state of the Smart Labels:

- **Proximity sensor** of the D735
- **Short-press Page key**
- **Long-press Page key**

The triggers can be configured in the web interface (WUI) or on the phone menu itself (Settings menu → Preferences → Function Keys → SmartLabel Keys).

Smart Labels - V10 - D735

WUI: Functions Keys → Smart Label

The screenshot shows the 'SmartLabel' configuration page with the following sections:

- Idle Screen:**
 - Default Display Mode: Short
 - Alternative Display Mode: Full
 - Alternative Display Trigger: Proximity Sensor
- Call Screens:**
 - Default Display Mode: Short
 - Alternative Display Mode: Full
 - Alternative Display Trigger: Proximity Sensor
- Other Screens:**
 - Alternative Display Trigger: Short Press Page
- Options:**
 - Reset to default display mode after (sec.): 3
 - Return to label page 1 after (secs.): 0

An 'Apply' button is located at the bottom left of the configuration area.

The behaviour of the Smart Labels in "Idle Screen", "Call Screen" and "Other Screens" can be configured in the WUI as well as the time span it takes the phone to return to default display mode.

Label Display Type and Text

The label display type can also be defined. There are three different kinds available:

- Text
- Icon
- Text and Icon

The screenshot shows the 'SmartLabel Keys' configuration page. It features a table with columns for Context, Type, Number, Full Label Mode, and Short Label. A dropdown menu is open over the 'Full Label Mode' column, showing options: Text, Icon, and Icon and Text (which is selected). The table contains three rows labeled P1, P2, and P3.

	Context	Type	Number	Full Label Mode	Short Label	Ft
P1	Active	Line		Icon and Text		
P2	Active	Line		Icon and Text		
P3	Active	Line		Icon and Text		

If you have set either **Text** or **Icon and Text**, you will need to provide a **Short Label** to the key.

Smart Labels - V10 - D735

Related Settings

Parameter	Description	Valid Values	Default
<u>Idle Screen</u>			
Default Display Mode (smartlabel_idle_default)	Smart label display mode for Idle screen.	off, Short, Full	Short
Alternative Display Mode (smartlabel_idle_expanded)	Expanded label display mode when triggered for idle screen.	Short, Full	Full
Alternative Display Trigger (smartlabel_idle_trigger)	List of allowed trigger sources that expand the smartlabel display in the Idle Screen. SmartLabel will disappear automatically after x seconds, depending on Settings/smartlabel_dismiss_timeout.	off, Short Press Page Key, Long Press Page Key, Proximity Sensor	Proximity Sensor
<u>Call Screen</u>			
Default Display Mode (smartlabel_call_default)	Label display mode for Call Handling screens.	off, Short	Short
Alternative Display Mode smartlabel_call_expanded	Expanded label display mode when triggered for Call Handling screens.	Short, Full	Full
Alternative Display Trigger (smartlabel_call_trigger)	List of allowed trigger sources that expand the smartlabel display in the Call Screen. SmartLabel will disappear automatically after x seconds, depending on Settings/smartlabel_dismiss_timeout.	off, Short Press Page Key, Long Press Page Key, Proximity Sensor	Proximity Sensor
<u>Other Screens</u>			
Alternative Display Trigger (smartlabel_other_trigger)	List of allowed trigger sources that expand the smartlabel display to full mode in Screens that are not the Idle or Call screens. SmartLabel will disappear automatically after x seconds, depending on Settings/smartlabel_dismiss_timeout .	off, Short Press Page Key, Long Press Page Key	Short Press Page Key
<u>Options</u>			
Reset to default display mode after (sec.) (smartlabel_dismiss_timeout)	This setting automatically returns the current smartlabel mode to the default , if no key has been pressed and the timeout (in seconds) has been reached	Number from 0 (off) to 360	3
Return to label page 1 after (secs.) (label_scroll_timeout)	The phone will return from any of the higher self-labeling keys pages to page 1 this many seconds after the page button was last pressed. Setting this value to zero disables this behaviour. The setting applies to models with a second display (D345, D385, D745, D785) where it is effective on the second display only. It also applies to models with SmartLabel depiction on the main display (D735).	0 to 1209600	0